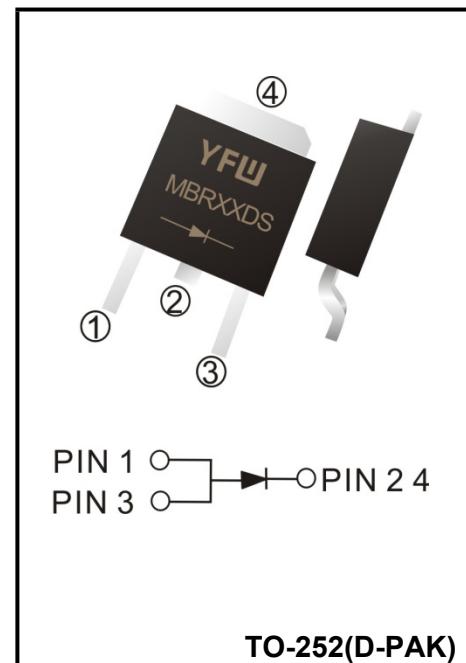


Surface Mount Schottky Barrier Rectifier
Reverse Voltage - 40 to 200 V
Forward Current - 3 A
FEATURES

- ◆ High current capability
- ◆ Low forward voltage drop
- ◆ High surge capability
- ◆ High temperature soldering guaranteed
- ◆ Mounting position: any
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- ◆ Case: TO-252(D-PAK)
- ◆ Terminals: Solderable per MIL-STD-750, Method 2026
- ◆ Approx. Weight: 0.32g / 0.011oz


Maximum Ratings and Electrical characteristics

Ratings at 25 ° ambient temperature unless otherwise specified.

Parameter	Symbols	MBR340DS	MBR345DS	MBR360DS	MBR3100DS	MBR3150DS	MBR3200DS	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	40	45	60	100	150	200	V
Maximum RMS voltage	V_{RMS}	28	31.5	42	70	105	140	V
Maximum DC Blocking Voltage	V_{DC}	40	45	60	100	150	200	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$				3.0			A
Peak Forward Surge Current, 8.3ms Single Half Sine-Wave Superimposed On Rated Load (JEDEC method)	I_{FSM}				80			A
Maximum Instantaneous Forward Voltage at 3 A	V_F	0.65	0.70	0.85	0.90	0.92		V
Maximum Instantaneous Reverse Current $T_A = 25^\circ C$ at Rated DC Reverse Voltage $T_A = 100^\circ C$	I_R	0.1 20			0.05 20			mA
Typical Junction Capacitance ⁽¹⁾	C_J	600		400				pF
Typical Thermal Resistance ⁽²⁾	$R_{\theta JA}$		45					$^\circ C/W$
Operating Junction Temperature Range	T_J		-55 ~ +150		-55 ~ +175			$^\circ C$
Storage Temperature Range	T_{stg}		-55 ~ +150		-55 ~ +175			$^\circ C$

⁽¹⁾ Measured at 1 MHz and applied reverse voltage of 4 V D.C

⁽²⁾ P.C.B. mounted with 10cm X 10cmX1mm copper pad areas.

Fig.1 TYPICAL FORWARD CURRENT DERATING CURVE

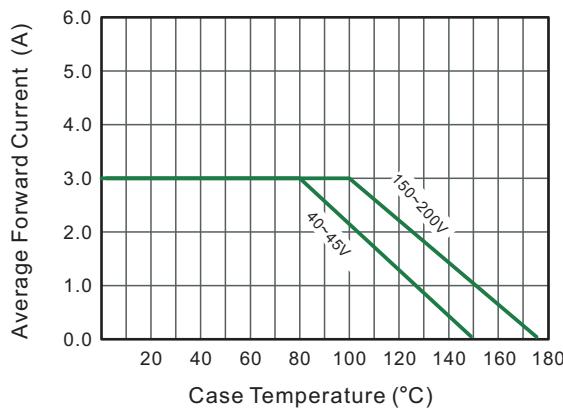


Fig.2 Typical Reverse Characteristics

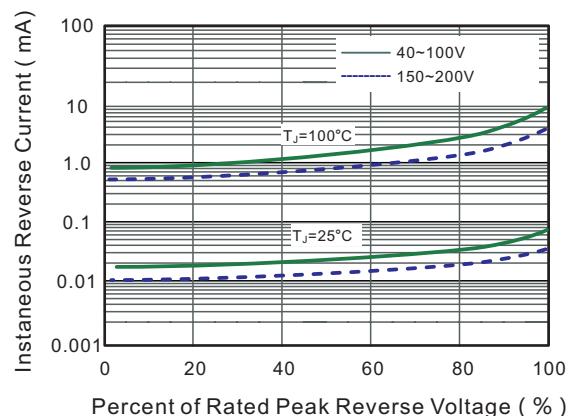


Fig.3 Typical Forward Characteristic

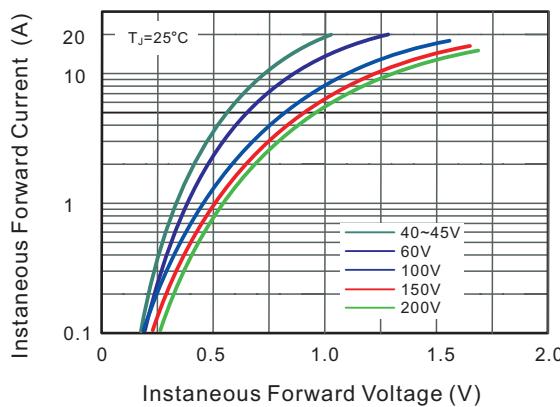


Fig.4 Typical Junction Capacitance

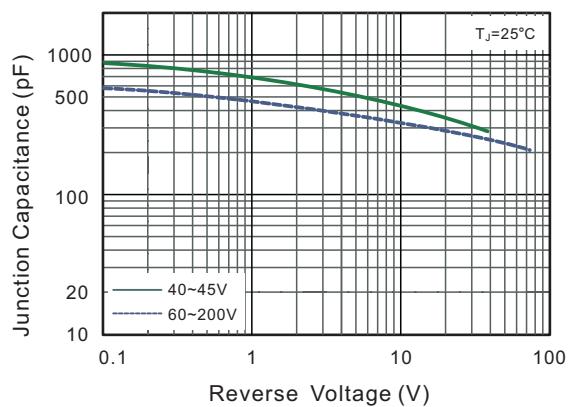


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current



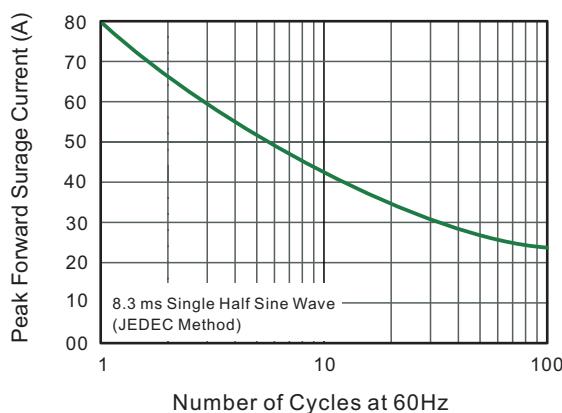


Fig.6- Typical Transient Thermal Impedance

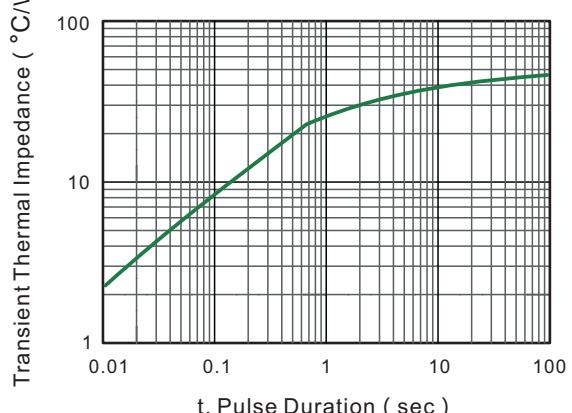


Package Outline

TO-252(D-PAK)

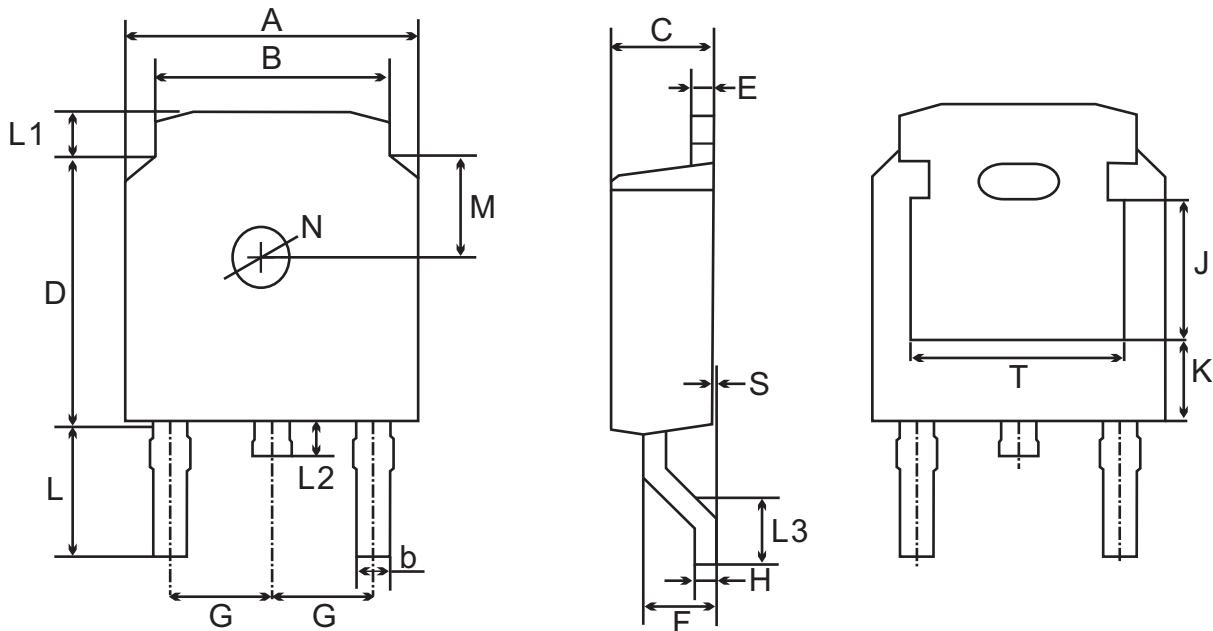

UNIT	A	B	b	C	D	E	F	G	H	L	L1	L2	L3	S	M	N	J	K	T
mm	max	6.7	5.5	0.8	2.5	6.3	0.6	2.29 TYPICAL	0.55	3.1	1.2	1.0	1.75	0.1	1.8 TYPICAL	1.3 TYPICAL	3.16 ref.	1.80 ref.	4.83 ref.
	min	6.3	5.1	0.3	2.1	5.9	0.4		0.45	2.7	0.8	0.6	1.40	0.0					
mil	max	264	217	31	98	248	24	90 TYPICAL	22	122	47	39	69	4	71 TYPICAL	51 TYPICAL	124 ref.	71 ref.	190 ref.
	min	248	201	12	83	232	16		18	106	31	24	55	0					

Marking on the body

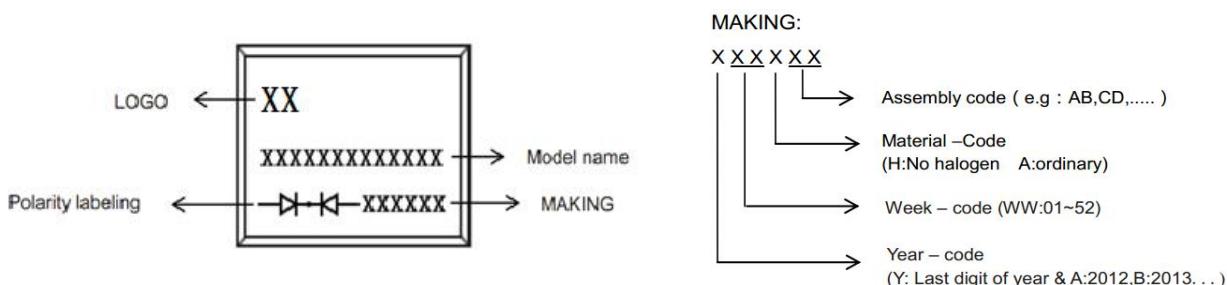

Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
TO-252(D-PAK)	Tape/Reel,13"reel	2500	EIA-481-1